

FORM PTO-1390 (Modified)
(REV 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES

PG3707USW

DESIGNATED/ELECTED OFFICE (DO/EO/US)

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

CONCERNING A FILING UNDER 35 U.S.C. 371

09/979569

INTERNATIONAL APPLICATION NO.

INTERNATIONAL FILING DATE

PRIORITY DATE CLAIMED

PCT/EP00/04499

May 18, 2000

May 21, 1999

TITLE OF INVENTION

METHOD AND APPARATUS FOR LOADING A CONTAINER WITH A PRODUCT

APPLICANT(S) FOR DO/EO/US

WILSON, Alan Anthony, FARR, Phillip William and PIKE, Marcus Edward

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☐ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☒ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☐ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☒ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☒ A copy of the International Search Report (PCT/ISA/210).

Items 13 to 20 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☒ Certificate of Mailing by Express Mail
23. ☒ Other items or information:

Copy of PCT Request

Copy of PCT Cover Sheet


U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 09/979569	INTERNATIONAL APPLICATION NO. PCT/EP00/04499	ATTORNEY'S DOCKET NUMBER PG3707USW
--	--	--


24. The following fees are submitted:.				CALCULATIONS PTO USE ONLY	
BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :					
<input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1040.00					
<input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00					
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740.00					
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00					
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00					
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$890.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).				\$0.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	80 - 20 =	60	x \$18.00	\$1,080.00	
Independent claims	2 - 3 =	0	x \$84.00	\$0.00	
<input type="checkbox"/> Multiple Dependent Claims (check if applicable).				\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$1,970.00	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27). The fees indicated above are reduced by 1/2.				\$0.00	
SUBTOTAL =				\$1,970.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).				\$0.00	
TOTAL NATIONAL FEE =				\$1,970.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable).				\$0.00	
TOTAL FEES ENCLOSED =				\$1,970.00	
				Amount to be: refunded	\$
				charged	\$

- a. ☐ A check in the amount of _____ to cover the above fees is enclosed.
- b. ☒ Please charge my Deposit Account No. **07-1392** in the amount of **\$1,970.00** to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. **01-1392**. A duplicate copy of this sheet is enclosed.
- d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:


23347
 PATENT TRADEMARK OFFICE

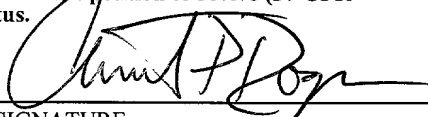
 SIGNATURE
Christopher P. Rogers
 NAME
36,334
 REGISTRATION NUMBER
19 Nov 2001
 DATE

09/979569

JC10 Rev'd PST/PTO 1 9 NOV 2001

IN THE UNITED STATES PATENT OFFICE

Applicant : WILSON, Alan A. et al
Appl. No. : not yet assigned
Filed : herewith
Title : Method and Apparatus for Loading a Container with a Product

Grp./A.U. :

Examiner :

Docket: : PG3707USW

Honorable Commissioner of Patents
Washington DC 20231

PRELIMINARY AMENDMENT

Sir:

Please amend the above-identified application as follows:

In the Specification:

After the Title, insert:

--This is a U.S. National Phase filing under 35 USC 371. Priority is claimed from PCT/EP00/04499 filed May 18, 2000, which claims priority from Patent Application GB 9911770.7 filed May 21, 1999 filed in the United Kingdom.--

In the Claims:

6. (Amended) A method according to claim 1, wherein the diameter of the closed-off perforation is between 1.5 and 15 mm.

Express Mail Label No.:
EL395941543US

09/979569

7. (Amended) A method according to claim 1, wherein said first leveller blade moves on a linear sweeping path.
8. (Amended) A method according to claim 1, wherein the forward acute angle is between 1 and 60°.
10. (Amended) A method according to claim 1, wherein the first leveller blade presents multiple forward acute angles to the linear sweeping path.
13. (Amended) A method according to claim 1, wherein the first leveller blade has a flat tail section.
14. (Amended) A method according to claim 7, comprising plural movements of the first leveller relative to the perforated plate.
15. (Amended) A method according to claim 7, wherein a thin layer of powder is left on the perforated bed after movement of the first leveller blade.
18. (Amended) A method according to claim 7, wherein the powder is further directable by at least one subsequent leveller blade.
24. (Amended) A method according to claim 1, additionally comprising removing excess powder from said perforated plate subsequent to directing powder into the perforation.
26. (Amended) A method according to claim 1, wherein the contents of the perforation are transferable by the action of a transfer pin.
27. (Amended) A method according to claim 1, wherein direction of powder into the closed-off perforation and transfer into the blind cavity is a continuous step.

28. (Amended) A method according to claim 1, wherein transfer of the contents of the perforation to the container comprises:

- a) reopening the perforation;
- b) placing the container in registration with the perforation; and
- c) transferring the contents of the perforation into the container.

29.(Amended) A method according to claim 1, wherein the contents of the perforation are transferable by the action of a vacuum system.

31. (Amended) A method according to claim 1, additionally comprising compacting the powder in the perforation.

34. (Amended) A method according to claim 31, wherein the powder is compactable by the action of a compacting pin.

35. (Amended) A method according to claim 26, wherein the transfer pin and the compacting pin are integral.

36. (Amended) A method according to claim 26, wherein the transfer pin and the compacting pin are identical.

37. (Amended) A method according to claim 1 wherein the container is a blind cavity.

39. (Amended) A method according to claim 1, additionally comprising applying a lid to the container to protect the contents therein.

40. (Amended) A method according to claim 1, wherein the powder comprises a medicament.

46. (Amended) An apparatus according to claim 42, wherein the diameter of the closed-off perforation is between 1.5mm and 15mm.

48. (Amended) An apparatus according to claim 42, wherein said first leveller blade is movable across the perforated plate on a linear sweeping path.

49. (Amended) An apparatus according to claim 1, wherein the forward acute angle is between 1 and 60°.

51. (Amended) An apparatus according to claim 42, wherein the first leveller blade presents multiple forward acute angles to the linear sweeping path.

54.(Amended) An apparatus according to claim 42, wherein the first leveller blade has a flat tail section.

55. (Amended) An apparatus according to claim 48, wherein the first leveller blade is positioned to leave a gap of between 3 and 20mm between the first leveller blade and the perforated plate.

57. (Amended) An apparatus according to claim 48, wherein the director further comprises at least one subsequent leveller blade.

61. (Amended) An apparatus according to claim 42, wherein the perforated plate forms the rim of a drum.

63. (Amended) An apparatus according to claim 42, wherein the transferor comprises a transferor pin.

64. (Amended) An apparatus according to claim 42, wherein the transferor comprises a vacuum system.

66. (Amended) An apparatus according to claim 42, additionally comprising a compactor for compacting the powder in the perforation.

68. (Amended) An apparatus according to claim 63, wherein the transferor and compactor are integral.

69. (Amended) An apparatus according to claim 63, wherein the transferor and compactor are identical.

70. (Amended) An apparatus according to claim 42, additionally comprising registration means for registering the container with the perforation.

71. (Amended) An apparatus according to claim 42, additionally comprising a powder remover for removing excess powder from the perforated plate subsequent to action of the powder director.

73. (Amended) An apparatus according to claim 42, wherein the container is a blind cavity.

75. (Amended) An apparatus according to claim 42, additionally comprising a lid applier for applying a lid to the container to protect the powder therein.

76. (Amended) An apparatus according to claim 42, further comprising powder.

79. (Amended) A tablet obtainable by the method according to claim 1.

80. (Amended) Compacted powder obtainable by the method according to claim 1.

REMARKS/ ARGUMENTS

This application is an U.S. National Phase application of PCT/EP00/04499 filed via the Patent Cooperation Treaty under 35 USC 371. Claims 1-80 are currently pending.

The specification has been amended to indicate the prior applications from which priority is claimed.

The claims are presented as amended in the Amended Sheets filed during PCT examination in response to the International Preliminary Examination Report. Claims 6-8, 10, 13-15, 18, 24, 26-29, 31, 34-37, 39-40, 46, 48-49, 51, 54-55, 57, 61, 63-64, 66, 68-71, 73, 75-76, 79 and 80 have been amended herein to eliminate multiple dependencies adapting the PCT application to US practice and reducing prosecution fees.

An Abstract on a separate sheet of paper has been added herein pursuant to US patent practice.


Attached hereto is a marked version of the changes made to the specification and claims by the current amendment. The attached page is captioned **"Version with markings to show changes made."**

Applicant respectfully requests that a timely Notice of Allowance be issued in this case.

Respectfully submitted,

Attorney for Applicants

BY

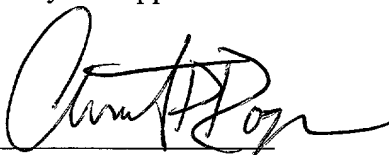

Christopher P. Rogers
Reg. No. 36,334
(919) 483-1240

19 Nov 2001

VERSION WITH MARKINGS TO SHOW CHANGES MADE

In the Specification

The specification was amended to include priority applications as follows:

After the Title, the following new paragraph was added:

--This is a U.S. National Phase filing under 35 USC 371. Priority is claimed from PCT/EP00/04499 filed May 18, 2000, which claims priority from Patent Application GB 9911770.7 filed May 21, 1999 filed in the United Kingdom.--

In the Claims

The claims were amended as follows:

1. A method of loading a container with a defined quantity of product which comprises:
 - a) closing off a perforation in a perforated plate;
 - b) directing powder into said closed-off perforation by the action of a first leveller blade moveable on a sweeping path relative to the perforated plate; and
 - c) transferring the contents of the perforation to said container,

wherein the first leveller blade is spaced from the perforated plate and presents a forward acute angle to the sweeping path.

2. A method according to claim 1, wherein the closing off is achievable by the use of a blanking plate.

3. A method according to claim 1, wherein the closing off is achievable by the use of a blanking pin inserted into the perforation.
4. A method according to claim 3, wherein the blanking pin is moveable within the perforation to adjust the volume of the closed-off perforation.
5. A method according to claim 1, wherein the closing off is achievable by placing a container in registration with the perforation.
6. (Amended) A method according to claim 1, ~~any of claims 1 to 5~~ wherein the diameter of the closed-off perforation is between 1.5 and 15 mm.
7. (Amended) A method according to claim 1 ~~any of claims 1 to 6~~, wherein said first leveller blade moves on a linear sweeping path.
8. (Amended) A method according to claim 1 ~~any of claims 1 to 7~~, wherein the forward acute angle is between 1 and 60°.
9. A method according to claim 8 wherein the forward acute angle is between 5 and 25°.
10. (Amended) A method according to claim 1 ~~any of claims 1 to 9~~, wherein the first leveller blade presents multiple forward acute angles to the linear sweeping path.
11. A method according to claim 10, wherein the first leveller blade is curved in form.
12. A method according to claim 11, wherein the first leveller blade is articulated in form.

13.(Amended) A method according to claim 1 ~~any of claims 1 to 9~~, wherein the first leveller blade has a flat tail section.

14.(Amended) A method according to claim 7 ~~any of claims 7 to 13~~ comprising plural movements of the first leveller relative to the perforated plate.

15. (Amended) A method according to claim 7 ~~any of claims 7 to 14~~, wherein a thin layer of powder is left on the perforated bed after movement of the first leveller blade.

16. A method according to claim 15, wherein the depth of said thin layer of powder is from 3 to 20 mm.

17. A method according to claim 16 wherein the depth of said thin layer of powder is from 4 to 8 mm.

18. (Amended) A method according to claim 7, ~~any of claims 7 to 17~~ wherein the powder is further directable by at least one subsequent leveller blade.

19. A method according to claim 18, wherein the at least one subsequent leveller blade moves along the perforated plate at a lower level than that of the first leveller blade.

20. A method according to claim 19, wherein the distance between the level of movement of the first leveller blade and the at least one subsequent leveller blade is 0 to 12 mm.

21. A method according to claim 20, wherein the distance between the level of movement of the first leveller blade and the at least one subsequent leveller blade is 1 to 3 mm.

22. A method according to any of claims 1 to 7, wherein the perforated plate forms the rim of a drum.

23. A method according to claim 22, wherein the powder is directable by gravity as said drum rotates.

24. (Amended) A method according to claim 1 ~~either any of claims 1 to 23~~, additionally comprising removing excess powder from said perforated plate subsequent to directing powder into the perforation.

25. A method according to claim 24, comprising removing said excess powder by the action of a wiper.

26. (Amended) A method according to claim 1, ~~any of claims 1 to 25~~, wherein the contents of the perforation are transferable by the action of a transfer pin.

27. (Amended) A method according to claim 1, ~~any of claims 1 to 26~~ wherein direction of powder into the closed-off perforation and transfer into the blind cavity is a continuous step.

28. (Amended) A method according to claim 1, ~~any of claims 1 to 27~~ wherein transfer of the contents of the perforation to the container comprises:

- a) reopening the perforation;
- b) placing the container in registration with the perforation; and
- c) transferring the contents of the perforation into the container.

29.(Amended) A method according to claim 1, ~~any of claims 1 to 25~~ wherein the contents of the perforation are transferable by the action of a vacuum system.

30. A method according to claim 29, wherein said vacuum system comprises a vacuum head and at least one vacuum cup.

31. (Amended) A method according to claim 1 ~~any of claims 1 to 30~~, additionally comprising compacting the powder in the perforation.

32. A method according to claim 31, wherein the powder is compacted to a volume of between 70 and 100% of the original volume of powder in the closed-off perforation.

33. A method according to claim 31, wherein the powder is compacted to form a tablet.

34. (Amended) A method according to claim 31, ~~any of claims 31 to 33~~, wherein the powder is compactable by the action of a compacting pin.

35. (Amended) A method according to claim 26, ~~either of claims 26 or 34~~, wherein the transfer pin and the compacting pin are integral.

36. (Amended) A method according to claim 26, ~~either of claims 26 or 34~~, wherein the transfer pin and the compacting pin are identical.

37. (Amended) A method according to claim 1 ~~any of claims 1 to 36~~ wherein the container is a blind cavity.

38. A method according to claim 37 wherein the blind cavity is selected from the group consisting of a blister pocket, an injection moulded plastic pocket, a capsule and a bulk container.

39. (Amended) A method according to claim 1 ~~any of claims 1 to 38~~, additionally comprising applying a lid to the container to protect the contents therein.

40. (Amended) A method according to claim 1 ~~any of claims 1 to 39~~, wherein the powder comprises a medicament.

41. A method according to claim 40 wherein the medicament is selected from the group consisting of albuterol, salmeterol, fluticasone propionate and beclomethasone dipropionate and salts or solvates thereof and any mixtures thereof.

42. An apparatus for loading a container with a defined quantity of product, which comprises:

- a) a perforated plate;
- b) a closure for reversibly closing off a perforation in the perforated plate;
- c) a director for directing powder into said perforation; said director comprising a first leveller blade movable on a sweeping path relative to the perforated plate; and
- d) a transferor for transferring the contents of the perforation to said container,

wherein the first leveller blade is spaced from the perforated plate and presents a forward acute angle to the sweeping path.

43. An apparatus according to claim 42, wherein the closure comprises a blanking plate.

44. An apparatus according to claim 42, wherein the closure comprises a blanking pin inserted into the perforation.

45. An apparatus according to claim 44, wherein the blanking pin is moveable within the perforation to adjust the volume of the perforation.

46. (Amended) An apparatus according to claim 42, ~~any of claims 42 to 45~~ wherein the diameter of the closed-off perforation is between 1.5mm and 15mm.

47. An apparatus according to claim 42, wherein the closure comprises the container placed in registration with the perforation.

48. (Amended) An apparatus according to claim 42 ~~any of claims 42 to 47~~, wherein said first leveller blade is movable across the perforated plate on a linear sweeping path.

49. (Amended) An apparatus according to claim 1 ~~any of claims 42 to 48~~, wherein the forward acute angle is between 1 and 60°.

50. An apparatus according to claim 49, wherein the forward acute angle is between 5 and 25°.

51. (Amended) An apparatus according to claim 42, ~~any of claims 42 to 50~~ wherein the first leveller blade presents multiple forward acute angles to the linear sweeping path.

52. An apparatus according to claim 51, wherein the first leveller blade is curved in form.

53. An apparatus according to claim 51, wherein the first leveller blade is articulated in form.

54.(Amended) An apparatus according to claim 42, ~~any of claims 42 to 50~~, wherein the first leveller blade has a flat tail section.

55. (Amended) An apparatus according to claim 48, ~~any of claims 48 to 54~~ wherein the first leveller blade is positioned to leave a gap of between 3 and 20mm between the first leveller blade and the perforated plate.

56. An apparatus according to claim 55, wherein the first leveller blade is positioned to leave a gap of between 4 and 8 mm between the first leveller blade and the perforated plate.

57. (Amended) An apparatus according to claim 48, ~~any of claims 48 to 56~~ wherein the director further comprises at least one subsequent leveller blade.

58. An apparatus according to claim 57, wherein the at least one subsequent leveller blade is positioned closer to the perforated plate than the first leveller blade.

59. An apparatus according to claim 58, wherein the at least one subsequent leveller blade is positioned 0 to 12 mm closer to the perforated plate than the first leveller blade.

60. An apparatus according to claim 59, wherein the at least one subsequent leveller blade is positioned 1 to 3 mm closer to the perforated plate than the first leveller blade.

61. (Amended) An apparatus according to claim 42, ~~any of claims 42 to 48~~ wherein the perforated plate forms the rim of a drum.

62. An apparatus according to claim 61, wherein the powder is directed into the closed-off perforations by gravity as the drum rotates.

63. (Amended) An apparatus according to claim 42, ~~any of claims 42 to 62~~, wherein the transferor comprises a transferor pin.

64. (Amended) An apparatus according to claim 42, ~~any of claims 42 to 62~~, wherein the transferor comprises a vacuum system.

65. An apparatus according to claim 64, wherein the vacuum system comprises a vacuum head and at least one vacuum cup.

66. (Amended) An apparatus according to claim 42, ~~any of claims 42 to 65~~ additionally comprising a compactor for compacting the powder in the perforation.

67. An apparatus according to claim 66, wherein the compactor comprises a compactor pin.

68. (Amended) An apparatus according to claim 63 ~~either of claims 63 or 67~~, wherein the transferor and compactor are integral.

69. (Amended) An apparatus according to claim 63 ~~either of claims 63 or 67~~, wherein the transferor and compactor are identical.

70. (Amended) An apparatus according to claim 42, ~~any of claims 42 to 69~~ additionally comprising registration means for registering the container with the perforation.

71. (Amended) An apparatus according to claim 42 ~~any of claims 42 to 70~~, additionally comprising a powder remover for removing excess powder from the perforated plate subsequent to action of the powder director.

72. An apparatus according to claim 71, wherein the powder remover comprises a wiper.

73. (Amended) An apparatus according to claim 42, ~~any of claims 42 to 72~~ wherein the container is a blind cavity.

74. An apparatus according to claim 73, wherein the blind cavity is selected from the group consisting of a blister pocket, an injection moulded plastic pocket, a capsule and a bulk container.

75. (Amended) An apparatus according to claim 42 ~~any of claims 42 to 74~~, additionally comprising a lid applier for applying a lid to the container to protect the powder therein.

76. (Amended) An apparatus according to claim 42, ~~any of claims 42 to 75~~ further comprising powder.

77. An apparatus according to claim 76, wherein the powder comprises a medicament.

78. An apparatus according to claim 77, wherein the medicament is selected from the group consisting of albuterol, salmeterol, fluticasone propionate and beclomethasone dipropionate and salts or solvates thereof and any mixtures thereof.

79. (Amended) A tablet obtainable by the method according to claim 1 ~~any of claims 1 to 41~~.

80. (Amended) Compacted powder obtainable by the method according to claim 1 ~~any of claims 1 to 41~~.

Method and apparatus for loading a container with a product

Field of invention

This invention relates to a method and apparatus for loading a container with a defined quantity of product. This invention has particular application to loading a blister in a blister pack with a defined quantity of medicament.

Background to the invention

The use of blister packs to hold medicaments for inhalation devices, for example in bronchodilation therapy, is well known. The blister packs usually consist of a base sheet in which blisters are formed. The blisters are arranged on the base sheet and can be filled with medicament to be administered through use of an inhalation device. A lid sheet is applied to cover the filled blisters and the two sheets are sealed together to form a blister pack.

There can, however, be problems associated with methods of filling the blisters with medicament. Powder, particularly the drug component of the powder, can tend to be attracted to the base sheet surface rather than to the blister pockets. This attraction of the drug to the base sheet can result in inaccurate filling of the blisters, create mess and potentially cause problems with adherence of the lid sheet to the base sheet. Such filling methods may also require a large reservoir of powder, potentially resulting in waste of the medicament.

The Applicants have now found that the potential problem of powder adherence can be overcome by using a filling method utilising a perforated plate to mask the base sheet surface during filling to avoid covering this area with powder. The perforated plate is simply moved into contact with the appropriate areas of the blister strip during filling and then moved away at the end of the method and can be reused in

each cycle. This filling method, therefore, aims to prevent the powder adhering to the blister strip, rather than relying on using methods such as additional cleaning steps to remove the powder after it has accumulated. The filling method can also be used to fill other types of containers e.g. injection moulded plastic pockets, capsules or bulk containers.

The perforated plate is also used to assist with ensuring the correct dose of powder is loaded into the blind cavity. In one aspect, adjusting the size of the perforation enables different doses to be loaded into the blisters.

Another problem associated with filling blister packs with powdered medicament is that the powder often has poor flow properties, making accurate filling difficult. The applicants have found that this problem can be overcome by the use of a director, for example a blade, which can direct the powder into the perforations. The blade can be passed through the powder several times or multiple blades may be used to ensure that filling is accurate.

The applicants have also found that the method and apparatus described herein can also be used to form tablets by applying increased compaction forces to the powder. The use of this method avoids many of the pre-processing steps (e.g. granulation) usually involved in tablet formation by gravity feed of the powder.

Summary of the invention

According to the present invention there is provided a method of loading a container with a defined quantity of product which comprises:

- a) closing off a perforation in a perforated plate;
- b) directing powder into said closed-off perforation; and
- c) transferring the contents of the perforation to said container.

Preferably, the closing off is achievable by the use of a blanking plate.

Alternatively, the closing off is achievable by the use of a blanking pin inserted into the perforation. Preferably the blanking pin is moveable within the perforation to adjust the volume of the closed-off perforation.

Alternatively, the closing off is achievable by placing a container in registration with the perforation.

Preferably, the diameter of the closed-off perforation is between 1.5 and 15mm. The perforation may be a variety of shapes, such as square, circular, oval or rectangular.

Preferably, the powder is directable by the action of a first leveller blade movable relative to the perforated plate. Preferably said first leveller blade moves on a linear sweeping path. Prior art filling systems often use either rotary levelling blades or systems or a static blade in a rotating powder filled bowl. Linear movement of the leveller blade has several advantages over a rotary system. For example, linear movement of the powder across the powder bed by the leveller blade can produce a powder bed with a more uniform density than a rotary system. Linear movement of the powder is also more suited to a linear pack or strip and less powder may be required. There may also be less powder wastage than with a rotary system. The leveller blade may move either across the length or width of the perforated plate.

In one aspect, the first leveller blade is perpendicular to the linear sweeping path.

Alternatively, the first leveller blade presents a forward acute angle to the linear sweeping path. That is to say, the angle between the direction of the sweeping path and the blade is less than 90° . Preferably the forward acute angle is between 1° and 60° . More preferably the forward acute angle is between 5° and 25° .

Alternatively, the first leveller blade presents multiple forward acute angles to the linear sweeping path. Such a first leveller blade is typically articulated or curved.

It is also possible to use a first leveller blade presenting a forward obtuse angle to the linear path.

Optionally, the first leveller blade has plural movements relative to the perforated plate. The number of plural movements can be varied according to the flow properties of the powder to help ensure that the powder has a uniform density, resulting in more accurate dosing. Passing a leveller blade across the perforated plate more than once may in some circumstances be more economical than having multiple blades, although the time taken to fill the closed-off perforations may be greater than when using multiple blades.

Preferably, a thin layer of powder is left on the perforated plate after movement of the first leveller blade. Preferably the depth of said thin layer of powder is from 3 to 20 mm. More preferably the depth of said thin layer of powder is from 4 to 8 mm.

Preferably, the powder is directable by at least one subsequent leveller blade. Preferably, the at least one subsequent leveller blade moves along the perforated plate at a lower level than that of the first leveller blade. This ensures that the at least one subsequent leveller blade can move through the thin layer of powder left by the first leveller blade and not just along the surface of the powder.

Preferably, the distance between the level of movement of the first leveller blade and the at least one subsequent leveller blade is 0 to 12 mm. More preferably the distance between the level of movement of the first leveller blade and the at least one subsequent leveller blade is 1 to 3 mm. A second subsequent leveller blade would move along the perforated plate at a lower level to that of a first subsequent leveller blade.

According to one embodiment of the invention the perforated plate forms the rim of a drum. In one aspect, the powder is directable into the perforations of the perforated plate by gravity as the drum rotates.

An additional component of the invention comprises removing excess powder from said perforated plate subsequent to directing powder into the perforation. Preferably the excess powder is removed by the action of a wiper. The wiper is typically a blade composed of stainless steel and moves in close proximity to the surface of the perforated plate to ensure that excess powder is not transferred to the blind cavity.

Preferably, the contents of the perforation are transferable by the action of a transfer pin. The pin is inserted into the perforation, transferring the powder through to the blind cavity.

Preferably the direction of powder into the closed-off perforation and transfer into the blind cavity is a continuous step.

Alternatively, transfer of the contents of the perforation to the container comprises:

- a) reopening the perforation;
- b) placing the container in registration with the perforation; and
- c) transferring the contents of the perforation into the container.

Alternatively, the contents of the perforation are transferable by the action of a vacuum system. Preferably the vacuum comprises a vacuum head and at least one vacuum cup.

An additional component of the invention comprises compacting the powder in the perforation.

Preferably, the powder is compacted to a volume of between 70 and 100% of the original volume of powder in the closed-off perforation.

Alternatively, the powder is compacted to form a tablet.

Preferably, the powder is compactable by the action of a compacting pin. Preferably the transfer pin and the compacting pin are integral. More preferably the transfer pin and the compacting pin are identical.

Preferably, the container is a blind cavity. Preferably, the blind cavity is selected from the group consisting of a blister pocket, an injection moulded plastic pocket, a capsule and a bulk container. A blister pocket or injection moulded plastic pocket may form part of an elongate strip used in inhalation devices.

An additional component of the invention comprises applying a lid to the container to protect the contents therein. The lid may then be sealed to the container.

Preferably, the powder comprises a medicament. Preferably the medicament is selected from the group consisting of albuterol, salmeterol, fluticasone propionate and beclomethasone dipropionate and salts or solvates thereof and any mixtures thereof. A preferred combination comprises salmeterol xinafoate and fluticasone propionate. Optionally, excipient such as lactose or another sugar may be present together with the medicament.

The invention also provides an apparatus for loading a container with a defined quantity of product, which comprises:

- a) a perforated plate;
- b) a closure for reversibly closing off a perforation in the perforated plate;
- c) a director for directing powder into said perforation; and
- d) a transferor for transferring the contents of the perforation to said container.

The perforated plate forms the basis for a powder reservoir and may have side walls to form a container suitable for holding powder.

Preferably, the closure comprises a blanking plate.

Preferably, the closure comprises a blanking pin inserted into the perforation. Preferably the blanking pin is moveable within the perforation to adjust the volume of the perforation.

Alternatively, the closure comprises the container placed in registration with the perforation.

Preferably, the diameter of the closed-off perforation is between 1.5 and 15mm. The perforation may be a variety of shapes, such as square, circular, oval or rectangular.

Preferably, the director comprises a first leveller blade movable relative to the perforated plate. Preferably, said first leveller blade is movable across the

perforated plate on a linear sweeping path. Preferably, the first leveller blade is positioned to leave a gap of between 3 and 20mm between the first leveller blade and the perforated plate. More preferably the first leveller blade is positioned to leave a gap of between 4 and 8mm between the first leveller blade and the perforated plate.

Preferably, the director comprises at least one subsequent leveller blade. Preferably, the at least one subsequent leveller blade is positioned closer to the perforated plate than the first leveller blade. Preferably, the at least one subsequent leveller blade is positioned 0 to 12mm closer to the perforated plate than the first leveller blade. More preferably the at least one subsequent leveller blade is positioned 1 to 3 mm closer to the perforated plate than the first leveller blade. A second subsequent leveller blade would move along the perforated plate at a lower level to that of a first subsequent leveller blade.

According to an alternative embodiment of the invention the perforated plate forms the rim of a drum. In one aspect, the powder is directed into the perforations of the perforated plate by gravity as the drum rotates.

Preferably, the transferor comprises a transferor pin.

Alternatively, the transferor comprises a vacuum system. Preferably the vacuum system comprises a vacuum head and a series of vacuum cups.

An additional component of the invention comprises a compactor for compacting the powder in the perforation. Preferably, the compactor comprises a compactor pin.

Preferably, the transferor and compactor are integral. More preferably the transferor and compactor are identical.

An additional component of the invention comprises registration means for registering the container with the perforation.

An additional component of the invention comprises a powder remover for removing excess powder from the perforated plate subsequent to action of the powder director. Preferably, the powder remover comprises a wiper. The wiper is typically a blade composed of stainless steel and moves in close proximity to the surface of the perforated plate to ensure that excess powder is not transferred to the blind cavity.

Preferably, the container is a blind cavity. Preferably, the blind cavity is selected from the group consisting of a blister pocket, an injection moulded plastic pocket, a capsule and a bulk container. A blister pocket or injection moulded plastic pocket may form part of an elongate strip used in inhalation devices.

An additional component of the invention comprises a lid applier for applying a lid to the container to protect the powder therein.

Preferably, the apparatus further comprises powder. Preferably, the powder comprises a medicament. Preferably, the medicament is selected from the group consisting of albuterol, salmeterol, fluticasone propionate and beclomethasone dipropionate and salts or solvates thereof and any mixtures thereof. A preferred combination comprises salmeterol xinafoate and fluticasone propionate.

The invention also provides a tablet obtainable by the method as herein described. Alternatively the invention provides compacted powder obtainable by the method as herein described.

Brief Description of the Drawings

The invention will now be described with reference to the accompanying drawings in which:

Figure 1a, 1b and 1c show the first stage in a filling method in accord with the present invention;

Figure 2 shows the first stage in an alternative filling method in accord with the present invention;

Figure 3 shows an optional subsequent compaction stage in the filling method of Figures 1a, 1b, 1c and 2;

Figure 4 shows a subsequent transfer stage in the filling method of Figures 1a, 1b, 1c and 2;

Figure 5 shows an alternative subsequent stage to the compaction stage of Figure 3 in the filling method of Figures 1a, 1b, 1c and 2;

Figure 6 shows a transfer stage subsequent to the subsequent stage of Figure 5;

Figures 7a and 7b show an alternative transfer stage subsequent to the subsequent stage of Figure 5;

Figure 8a shows the first stage in an alternative filling method in accord with the present invention;

Figure 8b shows an optional subsequent stage in the alternative filling method of Figure 8a; and

Figure 9 shows a further alternative filling method in accord with the present invention.

Detailed Description of the Drawings

Figures 1a, 1b and 1c show the first stages in a filling method herein. A perforated plate 10 in contact with a blanking plate 20 creates closed-off perforations 12a, 12b. On the opposite side of the perforated plate 10 to the blanking plate 20 is a reservoir of powder 30. The powder 30 comprises a suitable medicament formulation. Situated above the powder reservoir are leveller blades 40, 42 and wiper blade 50. The leveller blades may be seen to have following tail sections.

The leveller blades 40, 42 are shown mounted at an angle of approximately 45° to the perforated plate 10. It should however be appreciated that the leveller blades 40, 42 may be mounted at any angle within a wide range, typically (but not exclusively) at an acute angle and preferably between 1 and 60° , and may be varied according to the properties of the powder to optimise powder direction. When the blades are angled at an acute angle they exert a compressive force on the powder which produces a powder bed with a more uniform density than using perpendicular blades. However, it is also possible to use blades that are perpendicular to the linear path or are mounted at an obtuse angle to the linear path. It should be appreciated

that curved or articulated blades may alternatively be used. The tail sections of the leveller blades 40, 42 are not essential to their action although they may also be angled and exert a further compressive force on the powder. The wiper blade 50 is shown mounted at an angle of approximately 90° to the perforated plate 10, however effective operation of the wiper 50 can be obtained within a wide range of angles.

The powder 30 is directed into the perforations 12a, 12b by the action of leveller blades 40, 42 which move across the powder reservoir 30 on a sweeping linear path, moving the powder 30 along the length or width of the perforated plate 10. The first leveller blade 40 moves through the powder reservoir 30 leaving a thin layer of excess powder 32 still in contact with the perforated plate 10. The second leveller blade 42 moves across the perforated plate 10 at a lower level than the first leveller blade 40, moving through the thin layer of excess powder 32 and directing powder 30 into any spaces in the perforations 12a, 12b not filled by the action of the first leveller blade 40. Additional leveller blades may follow the second leveller blade 42 if required. Alternatively, the leveller blades 40, 42 may be passed through the powder reservoir 30 more than once if the powder has poor flow properties. The leveller blades, 40, 42 may then be moved back across the powder reservoir 30, without disrupting the thin layer of excess powder 32, or alternatively turned around ready for travel in the opposite direction, so that they are ready for use in the next filling cycle. A wiper 50, typically a blade composed of stainless steel, then moves along the powder reservoir 30 in close proximity to the surface of the perforated plate 10, removing the excess powder 32 from the perforated plate surface 10.

Figure 2 shows the first stage in an alternative filling method herein. Blanking pins 180a, 180b are inserted into a perforated plate 110 to create closed-off perforations 112a, 112b. The volume of the closed-off perforations 112a, 112b may be varied by varying the insertion depth of the blanking pins 180a, 180b. On the opposite side of the perforated plate 110 to the blanking pins 180a, 180b is a reservoir of powder 130. The powder 130 comprises a suitable medicament formulation. The powder 130 is directed into the perforations 112a, 112b (as shown in Figures 1a and 1b) by the action of a leveller blade 140 which moves across the powder reservoir 130 on a linear path and moves the powder 130 along the length of the perforated plate 110, leaving a thin layer of excess powder 132 still in contact with the perforated plate

110. The leveller blade shown illustrates a blade with a longer tail section than the blades shown in Figures 1a, 1b and 1c and this tail section is shown angled at about 10° to the linear path. However it should be appreciated that any blade in accord with the present invention may be used to fill the perforations closed off by the blanking pins. A wiper 150 follows the leveller blade 140 (as shown in Figure 1c) and moves along the powder reservoir 130 in close proximity to the surface of the perforated plate 110, removing the excess powder 132 from the perforated plate surface 110.

Figure 3 shows an optional subsequent stage to Figures 1a, 1b 1c and Figure 2 in which compaction pins 270a, 270b are inserted into the closed-off perforations 212a, 212b to compact the powder 230 held within the perforation 212a, 212b. The figure shows a blanking plate 220 acting to close off the perforations as in Figures 1a, 1b and 1c however it should be appreciated that this stage is also applicable to the situation where blanking pins are used to close off the perforations as in Figure 2. The blanking plate 220 may then be removed from its position in contact with the perforated plate 210 or the blanking pins removed from the closed-off perforations 212a, 212b. The powder 230 generally has poor flow properties and therefore remains in the perforations 212a, 212b.

Figure 4 shows a further stage to Figures 1a, 1b, 1c, 2 and 3 in which a blister strip 360 is moved so that it is positioned with blister pockets 362a, 362b in line with the perforations 312a, 312b. The solid sections 314a, 314b of the perforated plate 310 mask the surface surrounding the pockets 364. The transfer pins 370a, 370b are inserted through the perforated plate 310 and the powder 330 is transferred to the blister pockets 362a, 362b. The filled blister strip 360 is then lowered and the pins 370a, 370b raised. The blanking plate 320 is relocated against the underside of the perforated plate 310, creating closed-off perforations 312a, 312b, which are filled with powder 330 in the next cycle.

It should be appreciated that the powder can also be transferred to other types of container, for example an injection moulded container, a capsule or other form of blind cavity.

Figure 5 shows an alternative stage subsequent to Figures 1a, 1b, 1c and 2 in which the compaction pins 470a, 470b are inserted into the closed-off perforations 412a, 412b to compact the powder 430 held within the perforation 412a, 412b. The force applied to the powder 430 is sufficient to compress the powder 430 enough to form a tablet 435.

Figure 6 shows a transfer stage subsequent to Figure 5 in which the blanking plate 520 (or other blanking method e.g. blanking pins) is removed from its position in contact with the perforated plate 510, allowing the tablets 535 to fall out of the perforations and be collected by a bulk container 566. The transfer pins 570a, 570b may be used to help push the tablets 535 through the perforations 512a, 512b. The tablets may then be subjected to further processing steps before packaging. It should be appreciated that the tablets 535 may be transferred to other types of container such as a blister strip following an additional step to register the blister pockets with the perforations 512a, 512b.

Figures 7a and 7b show an alternative transfer stage subsequent to Figure 5 in which the tablets 635 are transferred by a vacuum head 690 into the container. The blanking pins 680a, 680b are raised within the perforations 612a, 612b to position the tablets 635 at the top of the perforations 612a, 612b. The vacuum head 690 comprising a series of vacuum cups 692, 694 is moved into position so that each vacuum cup 692, 694 is brought into registration with a perforation 612a, 612b. The vacuum cups 692, 694 then pick up the tablets 635 and the vacuum head 690 is lifted and moved away from the perforated plate 610 and brought into alignment with the blisters 662a, 662b of a blister pack, or into alignment with another suitable container. The tablets 635 are then transferred from the vacuum cups 692, 694 into the blister pack.

Figure 8a shows the first stage in an alternative filling method herein. A perforated plate 710 is positioned so that the blister pockets 762a, 762b of a blister strip 760 are in registration with the perforations 712a, 712b in the plate 710. The solid areas 714a, 714b of the perforated plate 710 mask the surface surrounding the pockets 764 of the blister strip 760. On the opposite side of the perforated plate 710 to the blister strip 760 is a reservoir of powder 730. The powder 730 is made up of a

medicament and a suitable excipient. The powder 730 is then directed into the perforations 712a, 712b (as shown in Figures 1a, 1b and 1c) by the action of a leveller blade 740. The leveller blade 740 shown here is curved, however a straight or articulated blade may be substituted to direct the powder into the perforations. Multiple blades (not shown) may be used to optimise the filling of the closed-off perforations 712a, 712b. The leveller blade 740 moves across the powder reservoir on a linear path 730, moving the excess powder 732 along the length of the perforated plate 710 and leaving a thin layer of powder 732 still in contact with the perforated plate 710. A wiper 750, typically a blade composed of stainless steel, follows the leveller blade 740 and moves along the powder reservoir 730 in close proximity to the surface of the perforated plate 710, removing excess powder 732 from the perforated plate surface 710.

Figure 8b shows an optional subsequent stage in which transfer and compaction pins 770a, 770b are inserted through the perforated plate 710 urging the powder 730 through into the underlying blister pockets 762a, 762b and compacting the powder 730. The pins 770a, 770b are raised and the blister strip 760 moves ready for the next section to be filled with powder 730 by the action of the leveller blade 740.

Figure 9 shows an alternative filling method. A perforated plate 810 forms the rim of a drum 815. The powder 830 is contained within the drum 815. A blister strip 860 is positioned so that the blister pockets 862a, 862b are in registration with the perforations 812a, 812b in the plate 810. The solid areas 814a, 814b of the perforated plate 810 mask the surface surrounding the pockets 864 of the blister strip 860. The blister strip 860 is fed onto and away from the drum 815 by tension alignment rollers 880, 882. A sealing station 890 is positioned so that a top foil 895 can be sealed to the blister strip 860 after it has left the drum 815.

The blister strip is fed onto the drum by tension alignment rollers 880 which align the blister strip 860 so that the blister pockets 862a, 862b are in registration with the perforations 812a, 812b in the plate 810. The powder 830 is directed into the closed-off perforations 812a, 812b and into the blister pockets 862a, 862b by gravity during rotation of the drum 815. A leveller blade (not shown) may also be used to direct the powder into the perforations 812a, 812b and a wiper (also not shown) may

sometimes be used to remove excess material from the perforated plate surface 810. A stripper plate 885 removes the blister strip 860 from the drum 815 and the strip 860 is passed over another set of tension alignment rollers 882. A top foil 895 is passed over a roller at a sealing station 890 and the top foil 895 is sealed to the filled blister strip 860.

The blister strip may be sealed by applying a lid sheet and providing sealing means so that the powder is contained in a medicament container defined by the pocket and elongate strip. Suitable methods of sealing the medicament carrier include the use of adhesives, staples or stamps and welding methods selected from hot metal welding, radio frequency welding and ultrasonic welding. Such sealing techniques may be used to form a suitable seal around the periphery of the medicament pocket which is capable of being peeled away by the patient or by a suitable trigger release mechanism in a controlled manner when in use.

The invention is suitable for filling blister packs, or other suitable containers, with powdered medicament or tablets, particularly for the treatment of respiratory disorders. Appropriate medicaments may thus be selected from, for example, analgesics, e.g., codeine, dihydromorphine, ergotamine, fentanyl or morphine; anginal preparations, e.g., diltiazem; antiallergics, e.g., cromoglycate, ketotifen or nedocromil; anti-infectives e.g., cephalosporins, penicillins, streptomycin, sulphonamides, tetracyclines, zanamivir and pentamidine; antihistamines, e.g., methapyrilene; anti-inflammatories, e.g., beclomethasone dipropionate, fluticasone propionate, flunisolide, budesonide, rofleponide, mometasone furoate, ciclesonide or triamcinolone acetonide; antitussives, e.g., noscapine; bronchodilators, e.g., albuterol, salmeterol, ephedrine, adrenaline, fenoterol, formoterol, isoprenaline, metaproterenol, phenylephrine, phenylpropanolamine, pirbuterol, reproterol, rimiterol, terbutaline, isoetharine, tulobuterol or 4-hydroxy-7-[2-[[[3-(2-phenylethoxy)propyl]sulfonyl]ethyl]amino]ethyl-2(3H)-benzothiazolone; diuretics, e.g., amiloride; anticholinergics, e.g., ipratropium, tiotropium, atropine or oxitropium; hormones, e.g., cortisone, hydrocortisone or prednisolone; xanthines, e.g., aminophylline, choline theophyllinate, lysine theophyllinate or theophylline; therapeutic proteins and peptides, e.g., insulin or glucagon; vaccines, diagnostics, and gene therapies. It will be clear to a person skilled in the art that, where

appropriate, the medicaments may be used in the form of salts, (e.g., as alkali metal or amine salts or as acid addition salts) or as esters (e.g., lower alkyl esters) or as solvates (e.g., hydrates) to optimise the activity and/or stability of the medicament and/or to minimise the solubility of the medicament in the propellant.

Preferred medicaments are selected from albuterol, salmeterol, ipratropium bromide, fluticasone propionate and beclomethasone dipropionate and salts or solvates thereof, e.g., the sulphate of albuterol and the xinafoate of salmeterol.

Medicaments can also be delivered in combinations. Preferred formulations containing combinations of active ingredients contain salbutamol (e.g., as the free base or the sulphate salt) or salmeterol (e.g., as the xinafoate salt) in combination with an anti-inflammatory steroid such as a beclomethasone ester (e.g., the dipropionate) or a fluticasone ester (e.g., the propionate). A particularly preferred combination comprises salmeterol xinafoate salt and fluticasone propionate.

It may be appreciated that any of the parts of the filling apparatus which contact the powder may be coated with materials such as fluoropolymer materials which reduce the tendency of medicament to adhere thereto. Suitable fluoropolymers include polytetrafluoroethylene (PTFE) and fluoroethylene propylene (FEP). Any movable parts may also have coatings applied thereto which enhance their desired movement characteristics. Frictional coatings may therefore be applied to enhance frictional contact and lubricants used to reduce frictional contact as necessary.

It will be understood that the present disclosure is for the purpose of illustration only and the invention extends to modifications, variations and improvements thereto.

The application of which this description and claims form part may be used as a basis for priority in respect of any subsequent application. The claims of such subsequent application may be directed to any feature or combination of features described therein. They may take the form of product, method or use claims or may include, by way of example and without limitation, one or more of the following claims:

CLAIMS

1. A method of loading a container with a defined quantity of product which comprises:
 - a) closing off a perforation in a perforated plate;
 - b) directing powder into said closed-off perforation by the action of a first leveller blade movable on a sweeping path relative to the perforated plate; and
 - c) transferring the contents of the perforation to said container,

wherein the first leveller blade is spaced from the perforated plate and presents a forward acute angle to the sweeping path.

2. A method according to claim 1, wherein the closing off is achievable by the use of a blanking plate.
3. A method according to claim 1, wherein the closing off is achievable by the use of a blanking pin inserted into the perforation.
4. A method according to claim 3, wherein the blanking pin is moveable within the perforation to adjust the volume of the closed-off perforation.
5. A method according to claim 1, wherein the closing off is achievable by placing a container in registration with the perforation.
6. A method according to any of claims 1 to 5, wherein the diameter of the closed-off perforation is between 1.5 and 15 mm.
7. A method according to any of claims 1 to 6, wherein said first leveller blade moves on a linear sweeping path.
8. A method according to any of claims 1 to 7, wherein the forward acute angle is between 1 and 60°.
9. A method according to claim 8, wherein the forward acute angle is between 5 and 25°.

10. A method according to any of claims 1 to 9, wherein the first leveller blade presents multiple forward acute angles to the linear sweeping path.
11. A method according to claim 10, wherein the first leveller blade is curved in form.
12. A method according to claim 11, wherein the first leveller blade is articulated in form.
13. A method according to any of claims 1 to 9, wherein the first leveller blade has a flat tail section.
14. A method according to any of claims 7 to 13 comprising plural movements of the first leveller relative to the perforated plate.
15. A method according to any of claims 7 to 14, wherein a thin layer of powder is left on the perforated bed after movement of the first leveller blade.
16. A method according to claim 15, wherein the depth of said thin layer of powder is from 3 to 20 mm.
17. A method according to claim 16, wherein the depth of said thin layer of powder is from 4 to 8 mm.
18. A method according to any of claims 7 to 17, wherein the powder is further directable by at least one subsequent leveller blade.
19. A method according to claim 18, wherein the at least one subsequent leveller blade moves along the perforated plate at a lower level than that of the first leveller blade.

20. A method according to claim 19, wherein the distance between the level of movement of the first leveller blade and the at least one subsequent leveller blade is 0 to 12 mm.
21. A method according to claim 20, wherein the distance between the level of movement of the first leveller blade and the at least one subsequent leveller blade is 1 to 3 mm.
22. A method according to any of claims 1 to 7, wherein the perforated plate forms the rim of a drum.
23. A method according to claim 22, wherein the powder is directable by gravity as said drum rotates.
24. A method according to either any of claims 1 to 23, additionally comprising removing excess powder from said perforated plate subsequent to directing powder into the perforation.
25. A method according to claim 24, comprising removing said excess powder by the action of a wiper.
26. A method according to any of claims 1 to 25, wherein the contents of the perforation are transferable by the action of a transfer pin.
27. A method according to any of claims 1 to 26, wherein direction of powder into the closed-off perforation and transfer into the blind cavity is a continuous step.
28. A method according to any of claims 1 to 27, wherein transfer of the contents of the perforation to the container comprises:
- a) reopening the perforation;
 - b) placing the container in registration with the perforation; and
 - c) transferring the contents of the perforation into the container.

29. A method according to any of claims 1 to 25, wherein the contents of the perforation are transferable by the action of a vacuum system.
30. A method according to claim 29, wherein said vacuum system comprises a vacuum head and at least one vacuum cup.
31. A method according to any of claims 1 to 30 additionally comprising compacting the powder in the perforation.
32. A method according to claim 31, wherein the powder is compacted to a volume of between 70 and 100% of the original volume of powder in the closed-off perforation.
33. A method according to claim 31, wherein the powder is compacted to form a tablet.
34. A method according to any of claims 31 to 33, wherein the powder is compactable by the action of a compacting pin.
35. A method according to either of claims 26 or 34, wherein the transfer pin and the compacting pin are integral.
36. A method according to either of claims 26 or 34, wherein the transfer pin and the compacting pin are identical.
37. A method according to any of claims 1 to 36, wherein the container is a blind cavity.
38. A method according to claim 37, wherein the blind cavity is selected from the group consisting of a blister pocket, an injection moulded plastic pocket, a capsule and a bulk container.
39. A method according to any of claims 1 to 38 additionally comprising applying a lid to the container to protect the contents therein.

40. A method according to any of claims 1 to 39, wherein the powder comprises a medicament.

41. A method according to claim 40, wherein the medicament is selected from the group consisting of albuterol, salmeterol, fluticasone propionate and beclomethasone dipropionate and salts or solvates thereof and any mixtures thereof.

42. An apparatus for loading a container with a defined quantity of product, which comprises:

- a) a perforated plate;
- b) a closure for reversibly closing off a perforation in the perforated plate;
- c) a director for directing powder into said perforation, said director comprising a first leveller blade movable on a sweeping path relative to the perforated plate; and
- d) a transferor for transferring the contents of the perforation to said container,

wherein the first leveller blade is spaced from the perforated plate and presents a forward acute angle to the sweeping path.

43. An apparatus according to claim 42, wherein the closure comprises a blanking plate.

44. An apparatus according to claim 42, wherein the closure comprises a blanking pin inserted into the perforation.

45. An apparatus according to claim 44, wherein the blanking pin is moveable within the perforation to adjust the volume of the perforation.

46. An apparatus according to any of claims 42 to 45, wherein the diameter of the closed-off perforation is between 1.5mm and 15mm.

47. An apparatus according to claim 42, wherein the closure comprises the container placed in registration with the perforation.

48. An apparatus according to any of claims 42 to 47, wherein said first leveller blade is movable across the perforated plate on a linear sweeping path.
49. An apparatus according to any of claims 42 to 48, wherein the forward acute angle is between 1 and 60°.
50. An apparatus according to claim 49, wherein the forward acute angle is between 5 and 25°.
51. An apparatus according to any of claims 42 to 50, wherein the first leveller blade presents multiple forward acute angles to the linear sweeping path.
52. An apparatus according to claim 51, wherein the first leveller blade is curved in form.
53. An apparatus according to claim 51, wherein the first leveller blade is articulated in form.
54. An apparatus according to any of claims 42 to 50, wherein the first leveller blade has a flat tail section.
55. An apparatus according to any of claims 48 to 54, wherein the first leveller blade is positioned to leave a gap of between 3 and 20mm between the first leveller blade and the perforated plate.
56. An apparatus according to claim 55, wherein the first leveller blade is positioned to leave a gap of between 4 and 8 mm between the first leveller blade and the perforated plate.
57. An apparatus according to any of claims 48 to 56, wherein the director further comprises at least one subsequent leveller blade.
58. An apparatus according to claim 57, wherein the at least one subsequent leveller blade is positioned closer to the perforated plate than the first leveller blade.

59. An apparatus according to claim 58, wherein the at least one subsequent leveller blade is positioned 0 to 12 mm closer to the perforated plate than the first leveller blade.

60. An apparatus according to claim 59, wherein the at least one subsequent leveller blade is positioned 1 to 3 mm closer to the perforated plate than the first leveller blade.

61. An apparatus according to any of claims 42 to 48, wherein the perforated plate forms the rim of a drum.

62. An apparatus according to claim 61, wherein the powder is directed into the closed-off perforations by gravity as the drum rotates.

63. An apparatus according to any of claims 42 to 62, wherein the transferor comprises a transferor pin.

64. An apparatus according to any of claims 42 to 62, wherein the transferor comprises a vacuum system.

65. An apparatus according to claim 64, wherein the vacuum system comprises a vacuum head and at least one vacuum cup.

66. An apparatus according to any of claims 42 to 65 additionally comprising a compactor for compacting the powder in the perforation.

67. An apparatus according to claim 66, wherein the compactor comprises a compactor pin.

68. An apparatus according to either of claims 63 or 67, wherein the transferor and compactor are integral.

69. An apparatus according to either of claims 63 or 67, wherein the transferor and compactor are identical.
70. An apparatus according to any of claims 42 to 69 additionally comprising registration means for registering the container with the perforation.
71. An apparatus according to any of claims 42 to 70 additionally comprising a powder remover for removing excess powder from the perforated plate subsequent to action of the powder director.
72. An apparatus according to claim 71, wherein the powder remover comprises a wiper.
73. An apparatus according to any of claims 42 to 72 wherein the container is a blind cavity.
74. An apparatus according to claim 73, wherein the blind cavity is selected from the group consisting of a blister pocket, an injection moulded plastic pocket, a capsule and a bulk container.
75. An apparatus according to any of claims 42 to 74 additionally comprising a lid applier for applying a lid to the container to protect the powder therein.
76. An apparatus according to any of claims 42 to 75 further comprising powder.
77. An apparatus according to claim 76, wherein the powder comprises a medicament.
78. An apparatus according to claim 77, wherein the medicament is selected from the group consisting of albuterol, salmeterol, fluticasone propionate and beclomethasone dipropionate and salts or solvates thereof and any mixtures thereof.
79. A tablet obtainable by the method according to any of claims 1 to 41.

80. Compacted powder obtainable by the method according to any of claims 1 to 41.

TOP SECRET

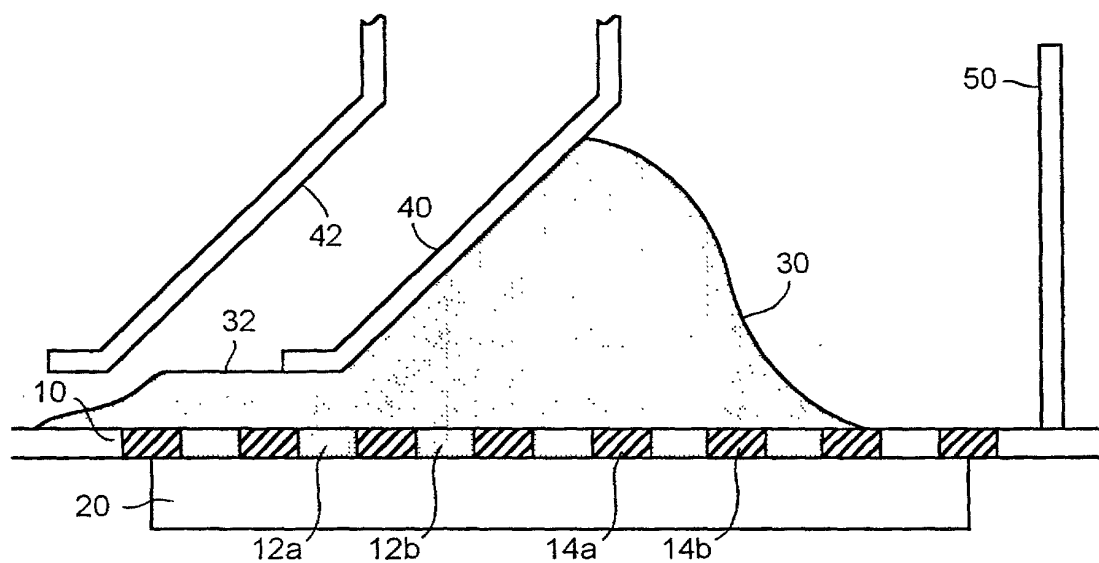


FIG. 1a

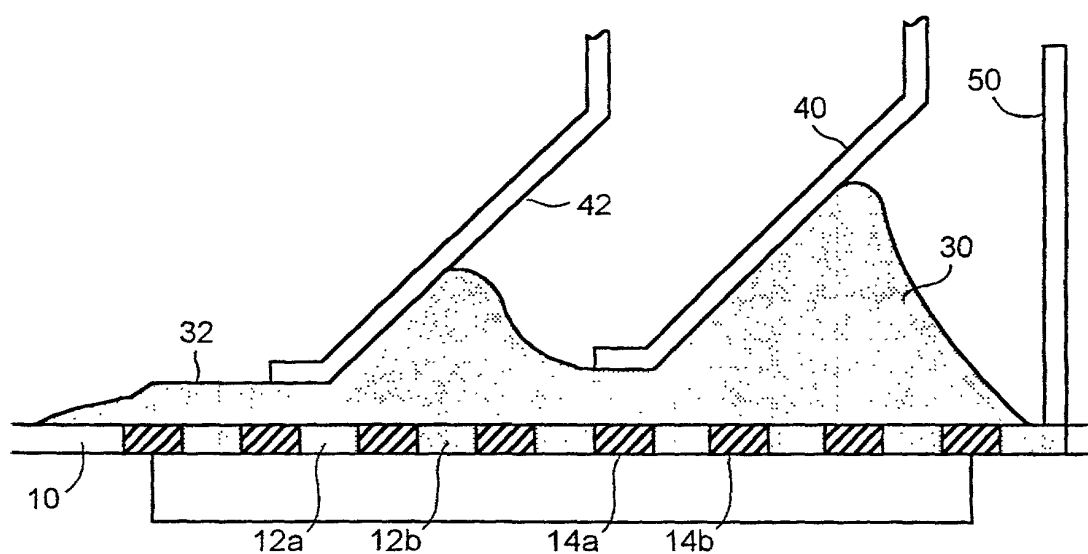


FIG. 1b

2/7

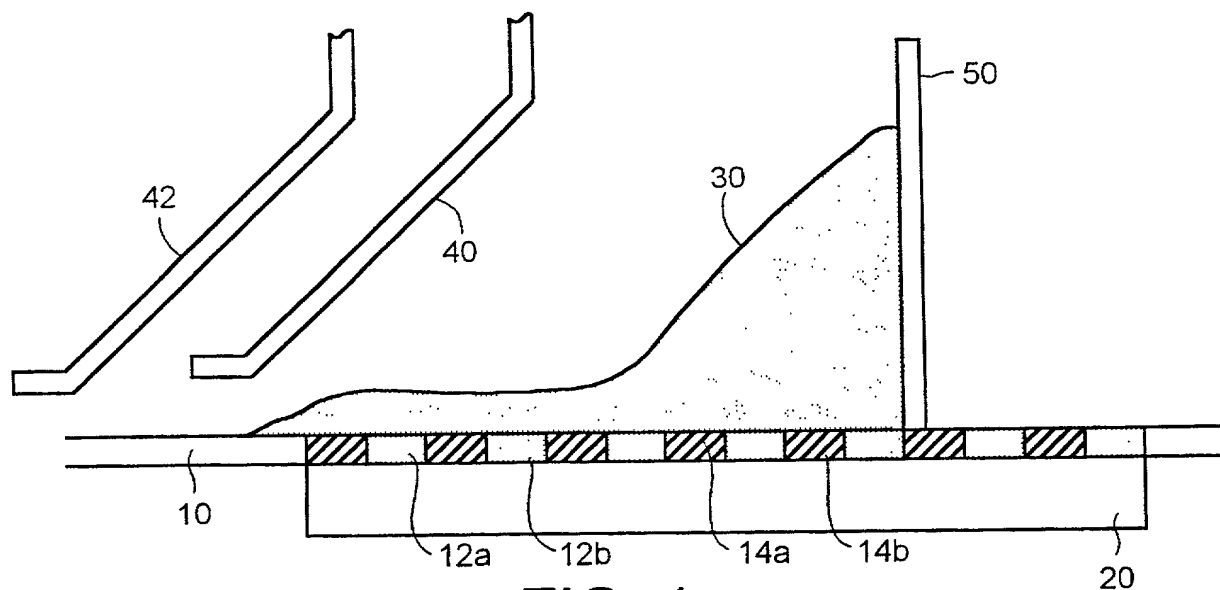


FIG. 1c

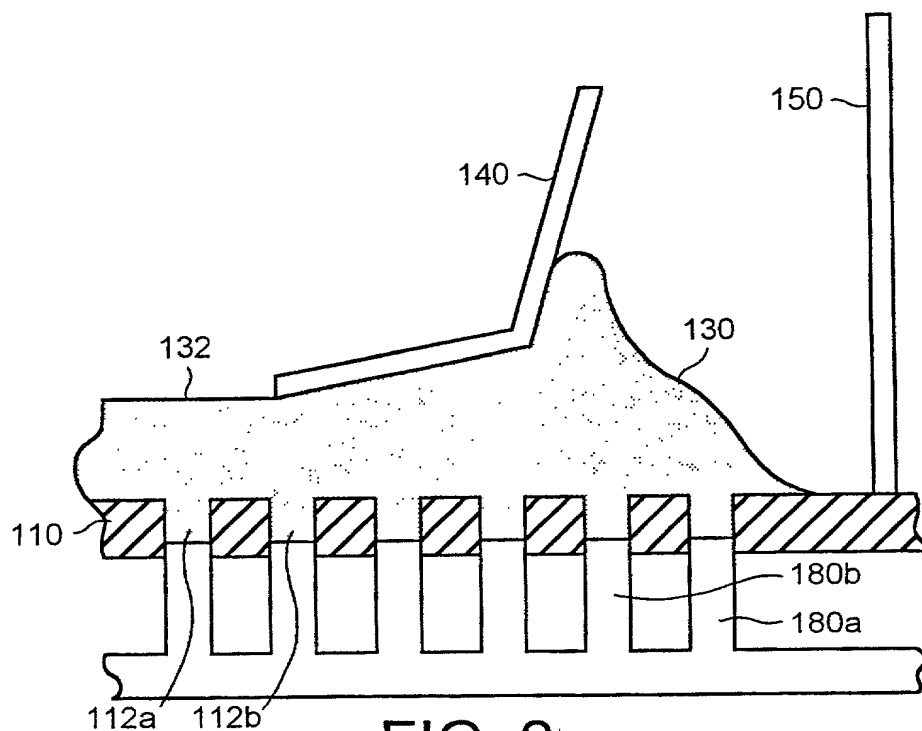


FIG. 2

106111 69562660

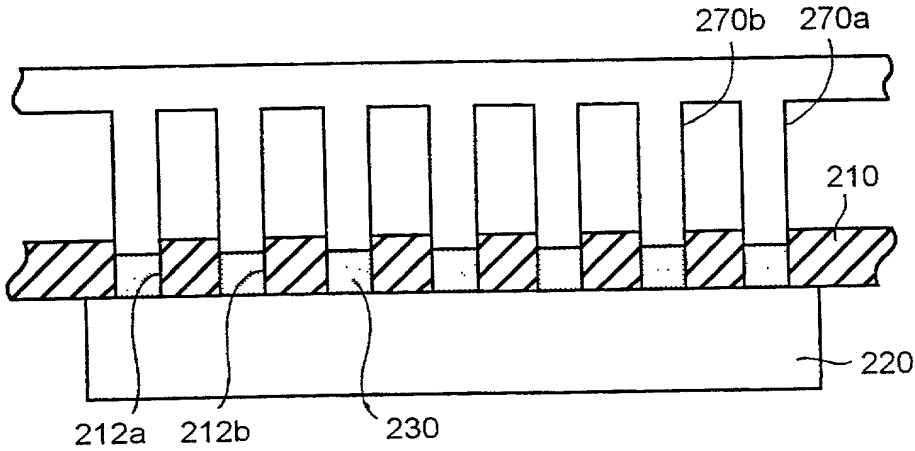


FIG. 3

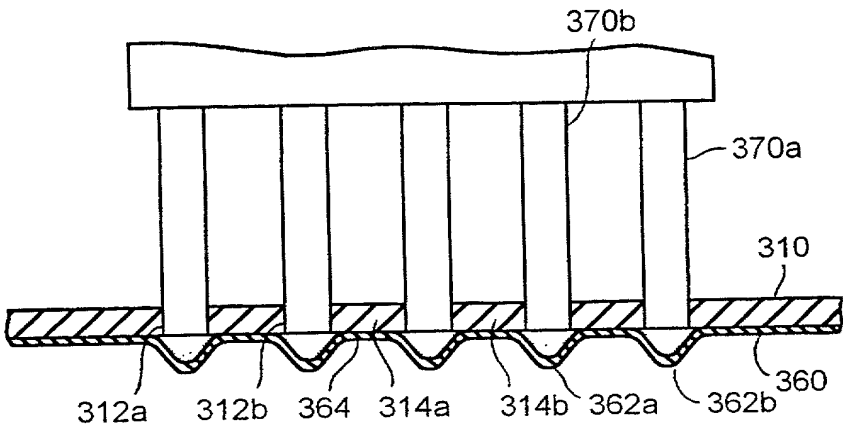


FIG. 4

4/7

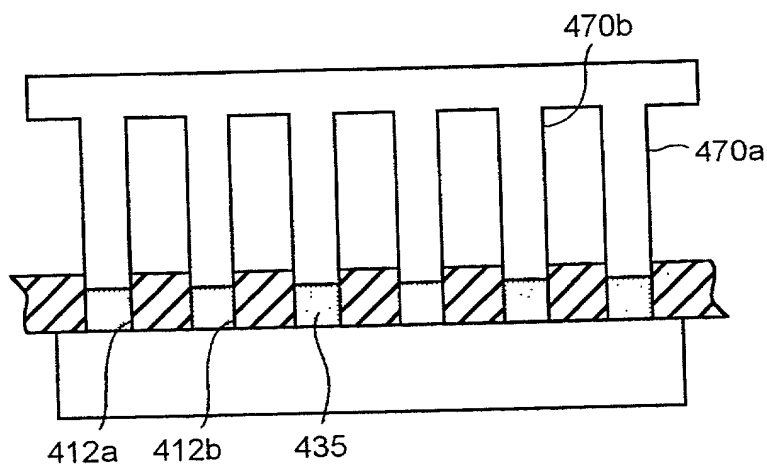


FIG. 5

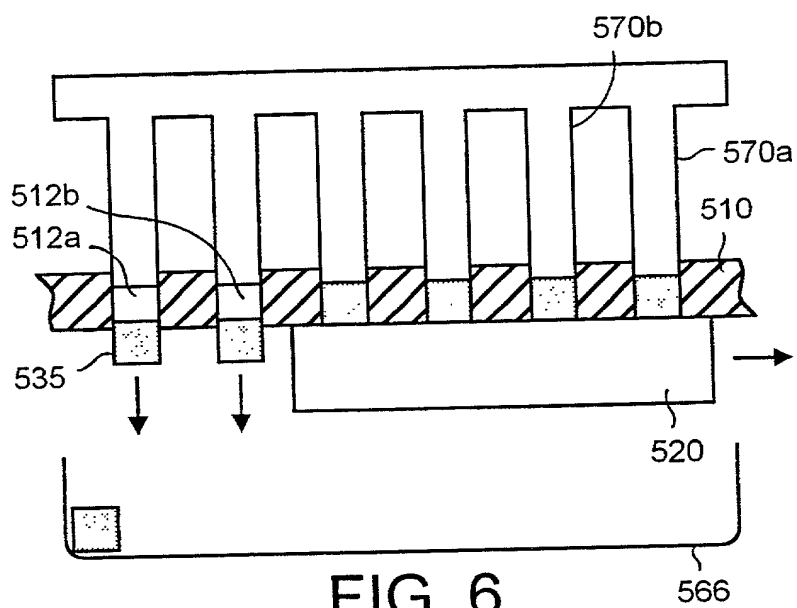


FIG. 6

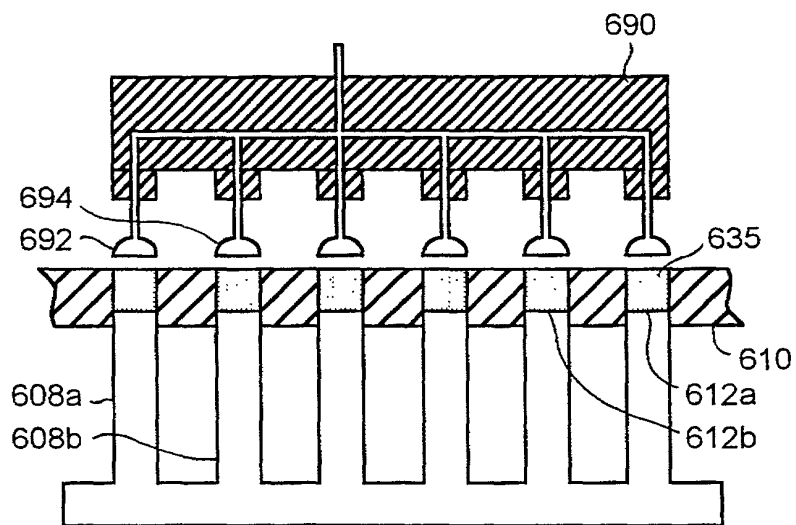


FIG. 7a

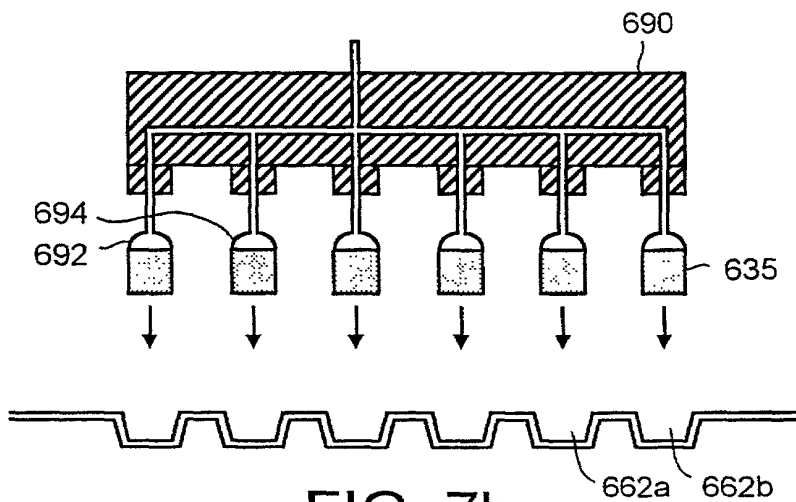


FIG. 7b

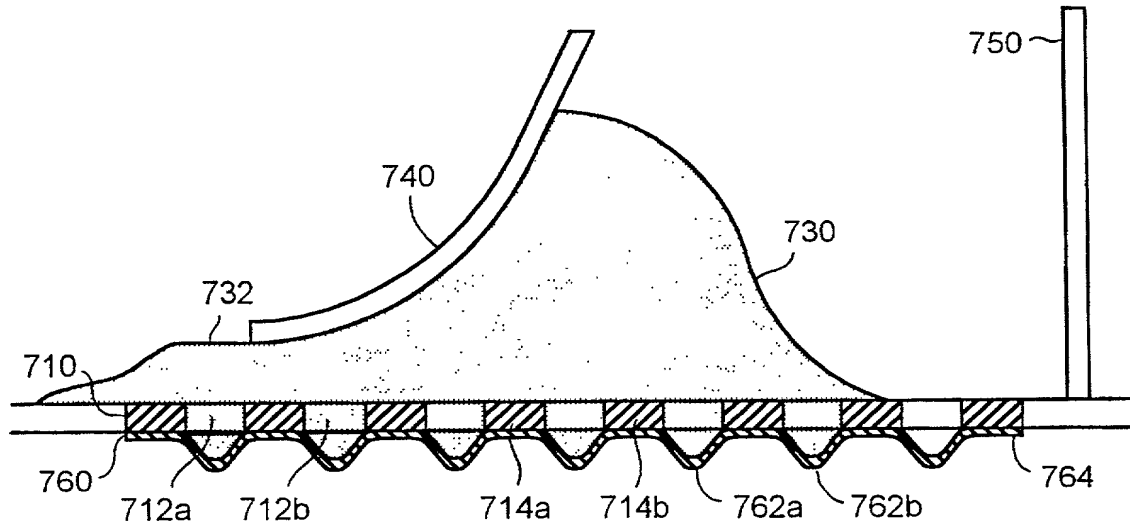


FIG. 8a

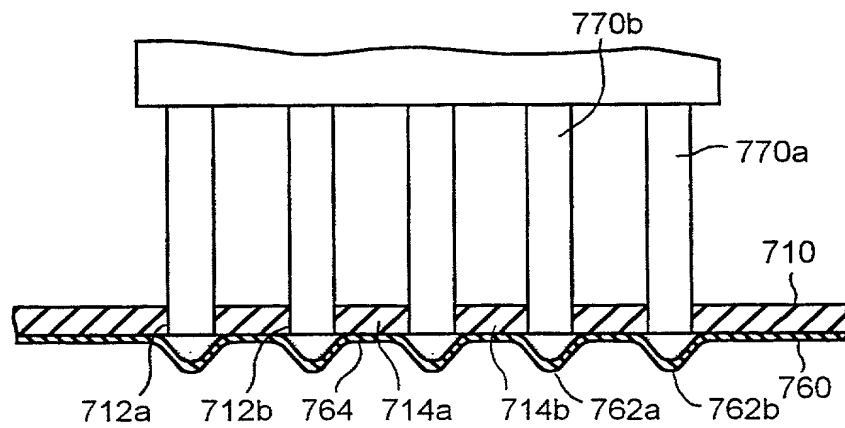


FIG. 8b

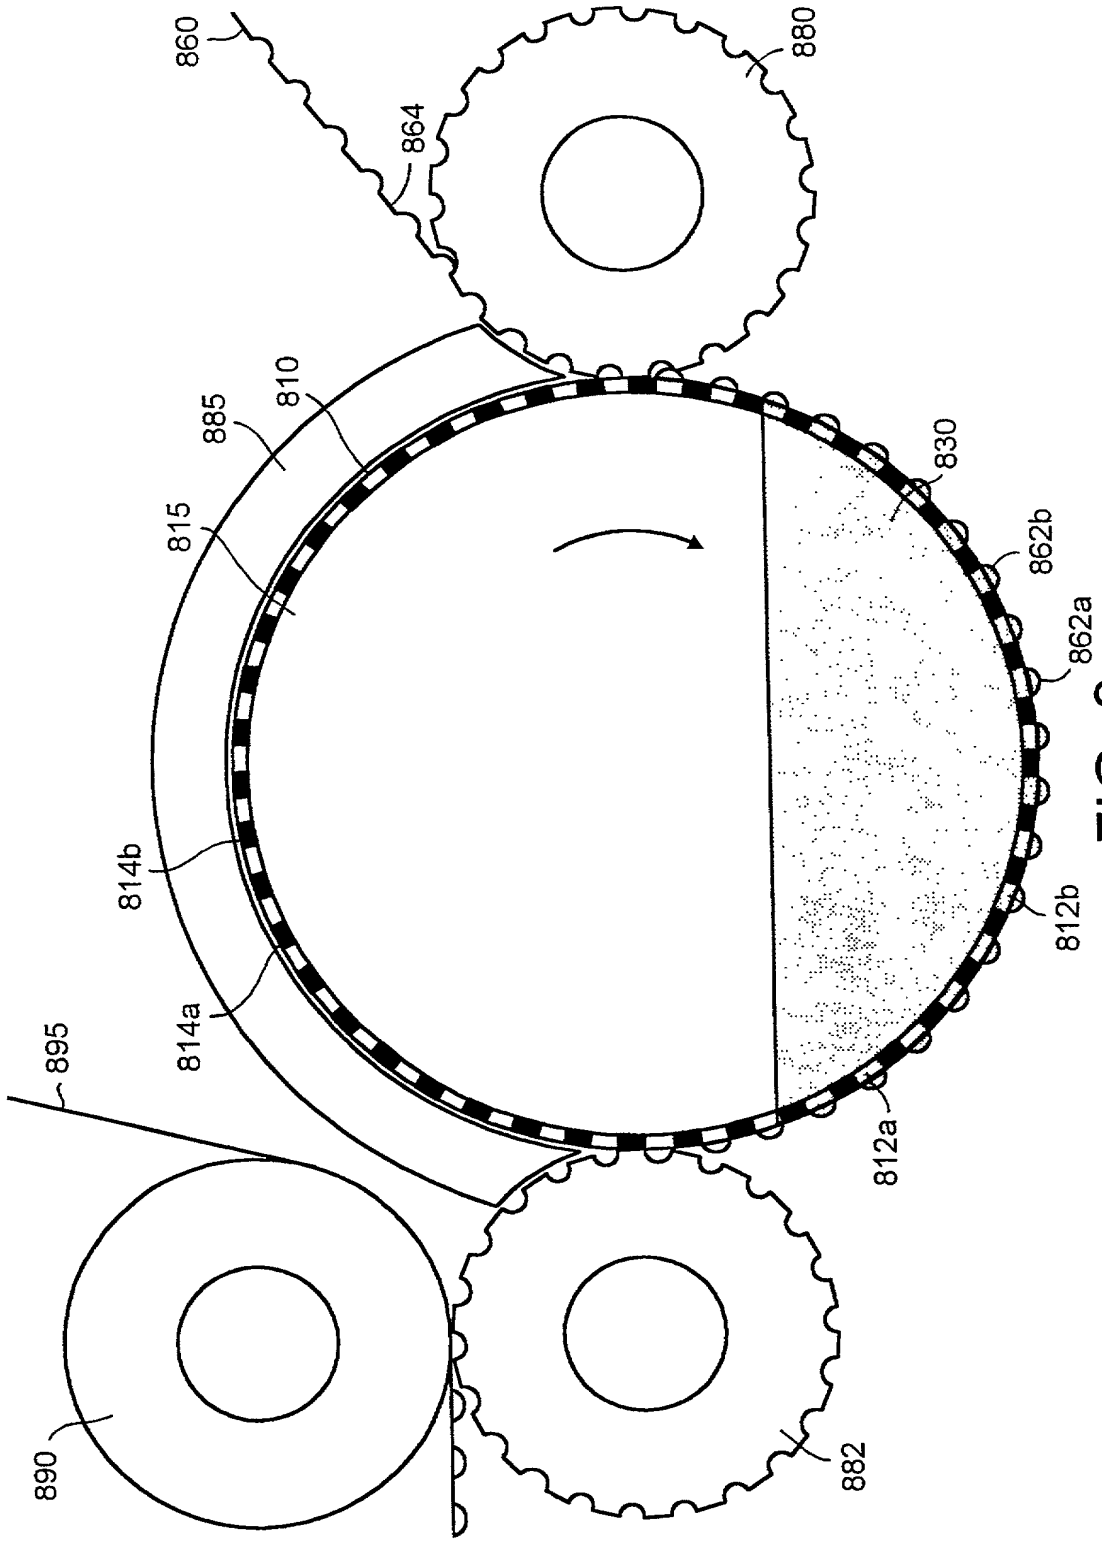


FIG. 9

FIG. 9

DECLARATION FOR "371" APPLICATION

**COMBINED DECLARATION FOR UTILITY OR DESIGN PATENT
APPLICATION WITH POWER OF ATTORNEY**ATTORNEY'S DOCKET
PG3707USWFirst Names Inventor:
Alan Anthony WILSONComplete if known:
App No.:

Filing Date

Group Art Unit:

() Declaration submitted with initial filing or

() Declaration submitted after initial filing (surcharge required 37CFR1.16(e))

As below named inventor. I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD AND APPARATUS FOR LOADING A CONTAINER WITH A PRODUCT

the specification of which (check only one item below):

☐ is attached hereto.

OR

☒ was filed on **18 May 2000** as United States application Serial No. _____ or PCT InternationalApplication Number **PCT/EP00/04499** filed and was amended on (MM/DD/YYYY) _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35, U.S.C. §119 (a)-(d) or §365(b) of any foreign applications(s) for patent or inventor's certificate or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or of any PCT international application having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. 119:

Prior Foreign Application Number (s)	Country	Foreign Filing Date (MM/DD/YYYY)	PRIORITY CLAIMED
1 9911770.7	GB	05/21/1999	X
2.			
3.			
4.			
5.			

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below:

Application No.	Filing Date (MM/DD/YYYY)	
1.		
2.		
3.		
4.		

Express Mail Label No.:
EL395941543US

DECLARATION FOR "371" APPLICATION

**COMBINED DECLARATION FOR UTILITY or DESIGN
PATENT APPLICATION WITH POWER OF ATTORNEY** ContinuedATTORNEY'S DOCKET NUMBER
PG3707USW

I hereby claim the benefit under 35, U.S.C. §120 of any United States application or §365(c) of any PCT international application designating the United States of America that is listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. §1.56 which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

PRIOR U.S. PARENT APPLICATION or PCT PARENT APPLICATION

		STATUS (Check one)		
U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	PATENTED	PENDING	ABANDONED

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the U.S. Patent and Trademark Office connected therewith. (List name and registration number)

David J. Levy Reg. No. 27,655
Charles E. Dadswell Reg. No. 35,851
Karen L. Prus Reg. No. 39,337
Robert H. Brink Reg. No. 36,094
Lorie Ann Morgan Reg. No. 38,181

James P. Riek Reg. No. 39,009
Virginia C. Bennett Reg. No. 37,092
Frank P. Grassler Reg. No. 31,164
Christopher P. Rogers Reg. No. 36,334

Bonnie L. Deppenbrock Reg. No. 28,209
John L. Lemanowicz Reg. No. 37,380
Amy H. Fix Reg. No. 42,616

Send Correspondence to:

David J. Levy, Patent Counsel
Corporate Intellectual Property Department
GlaxoSmithKline
Five Moore Drive, PO Box 13398
Research Triangle Park, NC 27709



23347

PATENT-TRADEMARK-OFFICE

Direct Telephone Calls to:

James P. RIEK
919-483-8022

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

1	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME/INITIAL
	INVENTOR'S SIGNATURE	Signature	Alan	Anthony
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY
		Ware	GB	GB
		GlaxoSmithKline	Durham	North Carolina 27709, US
		Five Moore Drive, PO Box 13398		
2	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME/INITIAL
	INVENTOR'S SIGNATURE	Signature	Phillip	William
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY
		Ware	GB	GB
		GlaxoSmithKline	Durham	North Carolina 27709, US
		Five Moore Drive, POBox 13398		
3	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME/INITIAL
	INVENTOR'S SIGNATURE	Signature	Marcus	Edward
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY
		Ware	GB	GB
		GlaxoSmithKline	Durham	North Carolina 27709, US
		Five Moore Drive, POBox 13398		